

In response to customer requests, start selling

~PRO_{TECH} 3 Standard~

large station guide assembly


High Quality & Technology For The Future

CONIC

NEWS

We additionally supply the Non Air Blow type guide assembly (standard type).
We improved even the convenience of the standard punch greatly.

		Standard guide assembly (conventional product)	PRO _{TECH} 3 Standard guide assembly	Comments	
①	Part where the punch can be reground (exclude narrow type or the like)	2mm	5mm	By changing only the guide assembly, the part where the punch can be reground becomes 2.5 times. You can still use the punch that you have disposed.	Economical
②	Easy to take the punch out	×	✓ About 1 minutes	Only by sliding the guide lock button, it is possible to disassemble the stripper plate and the stripper holder by fingertip without tools. Only when taking the punch out, it is necessary to use a hex wrench.	Easy
③	The grinding limit of the punch can be seen by visual inspection.	×	✓	It can be confirmed immediately with "confirmation memory" of the exterior part.	Accurate
④	Punch shim	Necessary	Unnecessary	It is easy to adjust without shim.	Easy

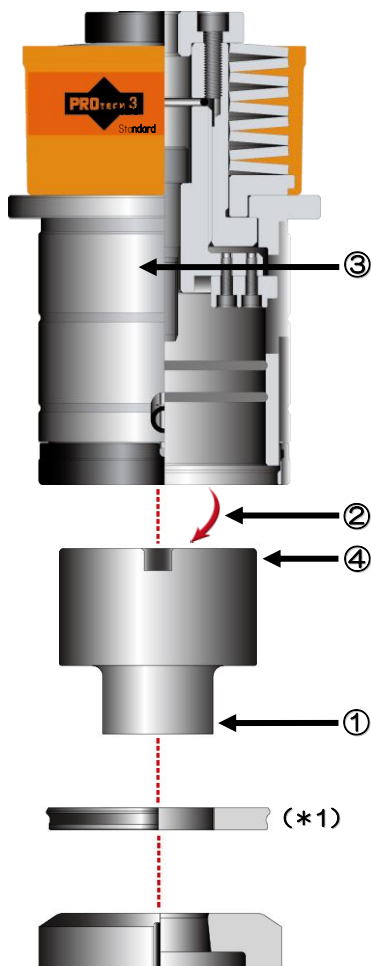

Maximum thickness : 6mm
Maximum processing capacity : 300KN



(* 1) Not compatible with the standard stripper (conventional product), only for PROTECH3

CONIC Co., Ltd.

TEL.+81-868-38-6154

FAX.+81-868-38-6331

E-mail: tools@conic.co.jp

URL: <http://www.conic.co.jp/EnPage/index.html>